


A100(MRA) 2000 - 5000KG CARGO LIFT



HOISTWAY PLAN

MACHINE ROOM PLAN

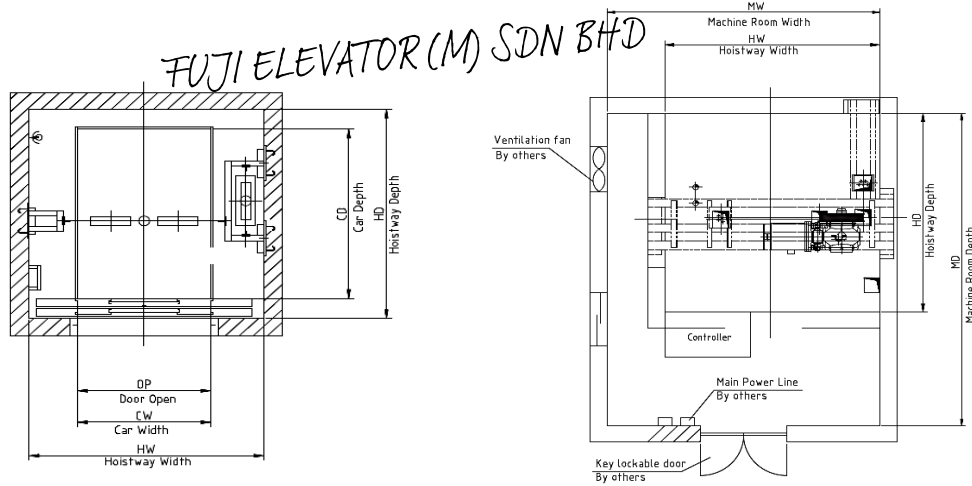

PLANNING GUIDE FOR DIMENSIONS OH and PIT-A100

Capacity Load(kg)	OH (mm)	PIT (mm)	Car Clear Height (CIH) (mm)	Door Height (mm)
2000	4500(0.5m/s)	1400	2200 (without false ceiling)	2100
	4800(1.0m/s)			
3000/3500	4600	1600		
4000	4600	1600		
5000	5000	1600	2400 (without false ceiling)	2300

PLANNING GUIDE FOR DIMENSIONS 2000-5000KG

FUJI ELEVATOR (M) SDN BHD

Speed(m/s)	Max. Travel (m)	Capacity Load(kg)	Car Size	Door Opening(mm)	Std. Hoistway Size / HWxHD (mmxmm)	
			CWxCD(mmxmm)		Single Opening	Through Opening
0.5/1.0	40	2000	1700x2400	CO 1700, 4 pannels	3000x2950	3000x3000
0.5	40	3000	2000x2800	CO 2000, 4 pannels	3400x3350	3400x3400
		3500	2200x3000	CO 2200, 4 pannels	3800x3550	3800x3600
		4000	2000x3600	CO 2000, 4 pannels	3550x4150	3550x4200
		5000 *	2400x3600	CO 2400, 4 pannels	4050x4150	4050x4200

* 5000kg is with 6 car guide rails