


# S100MRL/S100MMR CARGO LIFT

## HOISTWAY PLAN

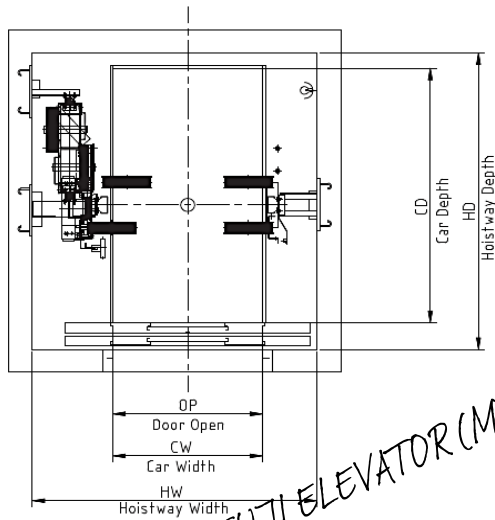

*FUJI ELEVATOR (M) SDN BHD*

PLANNING GUIDE FOR DIMENSIONS 2000-4000kg

Max. Travel (m)	Capacity Load(kg)	Car Size CWxCD(mmxmm)	Door Opening(mm)	Std. Hoistway Size / HWxHD (mmxmm)	
				Single Opening	Through Opening
40	2000	1500x2700	CO 1500, 4 pannels	2850x3150	2850x3300
	3000	1700x3300	CO 1700, 4 pannels	3350x3800	3350x3900
	3500	2000x3300	CO 2000, 4 pannels	3650x3800 (0.5mps)	3650x3900 (0.5mps)
				3800x3800 (1.0mps)	3800x3900 (1.0mps)
4000	2200x3300	CO 2200, 4 pannels	3850x3800 (0.5mps)	3850x3900 (0.5mps)	
			4000x3800 (1.0mps)	4000x3900 (1.0mps)	

*FUJI ELEVATOR (M) SDN BHD*

PLANNING GUIDE FOR DIMENSIONS OH and PIT - S100MRL

Speed(m/s)	Capacity Load(kg)	OH (mm)	PIT (mm)	Car Clear Height (CIH) (mm)	Door Height (mm)
0.5	2000	4500	1600	2200 (without false ceiling)	2100
	3000	4600	1650		
	3500/4000	4600	1650		
1	2000	4700	1600	2200 (without false ceiling)	2100
	3000	4800	1650		
	3500/4000	4900	1650		

PLANNING GUIDE FOR DIMENSIONS OH and PIT - S100MMR

Speed(m/s)	Capacity Load(kg)	OH (mm)	PIT (mm)	Car Clear Height (CIH) (mm)	Door Height (mm)
0.5	2000	4500	1500	2200 (without false ceiling)	2100
	3000	4600	1500		
	3500/4000	4600	1500		