


S820(MRL) 630-1000KG Passenger Lift

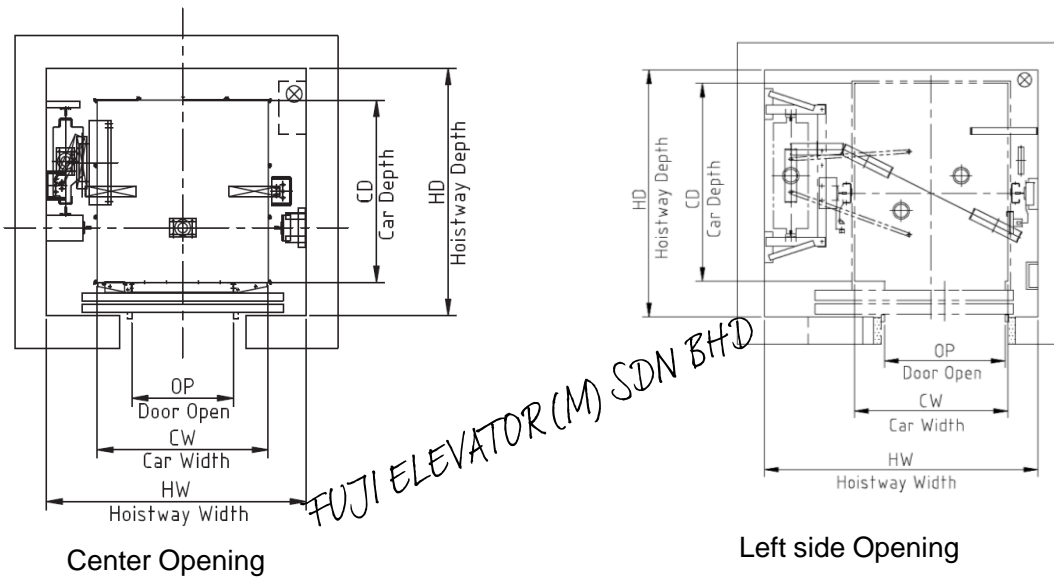

PLANNING GUIDE FOR DIMENSIONS -- Deep Car -- 630-1000kg

| Speed(m/s) | Capacity | | Car Size CWxCD (mmxmm) | Door Opening(mm) | Single Opening | | Through Opening | |
|----------------|----------|----------|---------------------------|------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| | Person | Load(kg) | | | Std. Hoistway Size HWxHD (mmxmm) | Min. Hoistway Size HWxHD (mmxmm) | Std. Hoistway Size HWxHD (mmxmm) | Min. Hoistway Size HWxHD (mmxmm) |
| | | | CO 800 | | | | | |
| 1.0, 1.5, 1.75 | 8 | 630 | 1100x1400 | CO 800 | 1850x1850 | 1750x1750 ** | 1850x1900 | 1750x1900 ** |
| | | | | CO 900 * | 2000x1850 | 1950x1750 | 2000x1900 | 1950x1900 |
| | | | | SO 800/900 * | 1750x1850 *** | 1700x1825 | 1750x2050 *** | 1700x2050 |
| | 10 | 800 | 1100x1700 | CO 800 | 1850x2150 | 1750x2050 | 1850x2200 | 1750x2200 |
| | | | | CO 900 * | 2000x2150 | 1950x2050 | 2000x2200 | 1950x2200 |
| | | | | SO 800/900 * | 1750x2150 *** | 1700x2125 | 1750x2350 *** | 1700x2350 |
| | 13 | 1000 | 1100x2100 | CO 800 | 1850x2550 | 1750x2450 | 1850x2600 | 1750x2600 |
| | | | | CO 900 * | 2000x2550 | 1950x2450 | 2000x2600 | 1950x2600 |
| | | | | SO 800/900 * | 1750x2550 *** | 1700x2525 | 1750x2750 *** | 1700x2750 |

FUJI ELEVATOR (M) SDN BHD

PLANNING GUIDE FOR DIMENSIONS -- Wide Car -- 630-1000kg

| Speed(m/s) | Capacity | | Car Size CWxCD (mmxmm) | Door Opening(mm) | Single Opening | | Through Opening | |
|----------------|----------|----------|---------------------------|------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| | Person | Load(kg) | | | Std. Hoistway Size HWxHD (mmxmm) | Min. Hoistway Size HWxHD (mmxmm) | Std. Hoistway Size HWxHD (mmxmm) | Min. Hoistway Size HWxHD (mmxmm) |
| | | | CO 800 | | | | | |
| 1.0, 1.5, 1.75 | 10 | 800 | 1350x1400 | CO 800 | 2000x1850 *** | 1950x1750 | 2000x1900 | 1950x1900 |
| | | | | CO 900 * | 2050x1850 | 1950x1750 | 2050x1900 | 1950x1900 |
| | | | | CO 1000 * | 2150x1850 | 2150x1750 | 2150x1900 | 2150x1900 |
| | 13 | 1000 | 1600x1400 | CO 900 | 2250x1850 *** | 2200x1750 | 2250x1900 | 2200x1900 |
| | | | | CO 1000 * | 2300x1850 | 2200x1750 | 2300x1900 | 2200x1900 |
| | | | | CO 1100 * | 2400x1850 | 2350x1750 | 2400x1900 | 2350x1900 |

PLANNING GUIDE FOR DIMENSIONS -- OH and PIT

| Speed (mm) | Max. Travel (m) | Std. OH (mm) | Min. OH (mm) | Std. PIT (mm) | Min. PIT (mm) | Car Clear Height (CIH) (mm) | Door Height (mm) |
|------------|-----------------|--------------|--------------|---------------|---------------|------------------------------------|------------------|
| 1.0 | 40 | 3850 | 3800 **** | 1400 | 1350 | 2200 (with 100mm false ceiling) | 2100 |
| 1.5 | 60 | 4000 | 3950 **** | 1500 | 1500 | | |
| 1.75 | 75 | 4100 | 4000 **** | 1550 | 1500 | | |